

GENERATOR 5500 W

- 12.2 HP petrol engine with electric start or pull starter as alternative
- Powerful and air cooled 12,2 HP / 9 kW 4 stroke petrol engine with 420 cc displacement
- 1x 400 V ~ connection max. 5500 W output power, 5000 W rated output
- 2x 230 V ~ connection max. 2200 W output power, 2000 W rated output
- A 400 V~ connection, two 230 V~ connection and a 12 V DC connector offering maximum flexibility
- Sturdy and robust steel frame with wheel kit and hinged handle
- 25 litre petrol tank allows using the generator for hours
- Integrated overload protection, voltmeter and low oil warning

Electric start

Convenient start

Electric start

360°



SPECIFICATIONS - GENERATOR	
Dimensions L x W x H	795 x 590 x 595 mm
Voltage control	AVR-System
230 V / 400 V max. output / rated	5000 / 5500 W (400 V~) 2000 / 2200 W (230 V~)
Socket	2 x 230 V~ / 1 x 400 V~
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes
Voltmeter	Yes

SPECIFICATIONS - ENGINE	
Model	Single-cylinder 4 stroke petrol engine
Max. engine power	12.2 HP
Displacement	420 cc
Starter	Pull starter, electric starter
Tank capacity	25 L

LOGISTICAL DATA	
Weight net / gross	82 / 89 kg
Packaging dimensions	790 x 595 x 595 mm
Article number	5906229903
Barcode	4046664194804
40 HQ Container	220 pcs


EXAMPLES OF USE

Camping

Garden shed

Event

Construction site

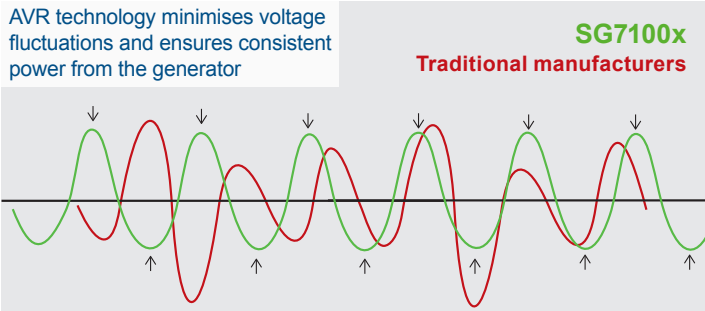

Fuel gauge

COPPER COIL

✓ Long service life
✓ Better electrical conductivity

420 cc 12.2 HP, 4-stroke petrol engine

Hinged Handle

PRODUCT DETAILS

1 x 400 V~ connection
1 x 12 V~ connection

2 x 230 V~ power outlet

Oil warning indicator

Robust

Overload protection

Fuel-saving

Power pack

Easy to manoeuvre

The oil level warning function protects the motor from running dry. An integrated voltage meter as well as overload protection ensure the safety of the device.

Thanks to its wheels, the SG7100x can be transported easily.